



- Applicable fiber: SM MM PON
- <1.8m extra-short event dead zone
- Up to 32/30dB High Dynamic Range
- Distance Range: 4,8,16,32,64,128,256km
- 640x480, 5.7 inch TFT-LCD (touch screen)
- 3 year Warranty
- USB interfaces, supporting USB stick and printer and direct cable download to PC via ActiveSync
- Memory capacity >800 traces
- Built-in lithium battery with high capacity for over 8 hours of operating life
- Display: Color LCD

Soporta 4 tipos de interfaz de fibra



FC



ST (Optional)



SC (Optional)



LC (Optional)

Superi 4430, CABA (1430)


info@gtt.com.ar

www.gtt.com.ar



INTERFAZ GUI

DISEÑO DE INTERFAZ GUI, LA OPERACIÓN ES MÁS SIMPLE, MÁS INTUITIVO REFLEJO DE LOS RESULTADOS DE LAS MEDICIONES

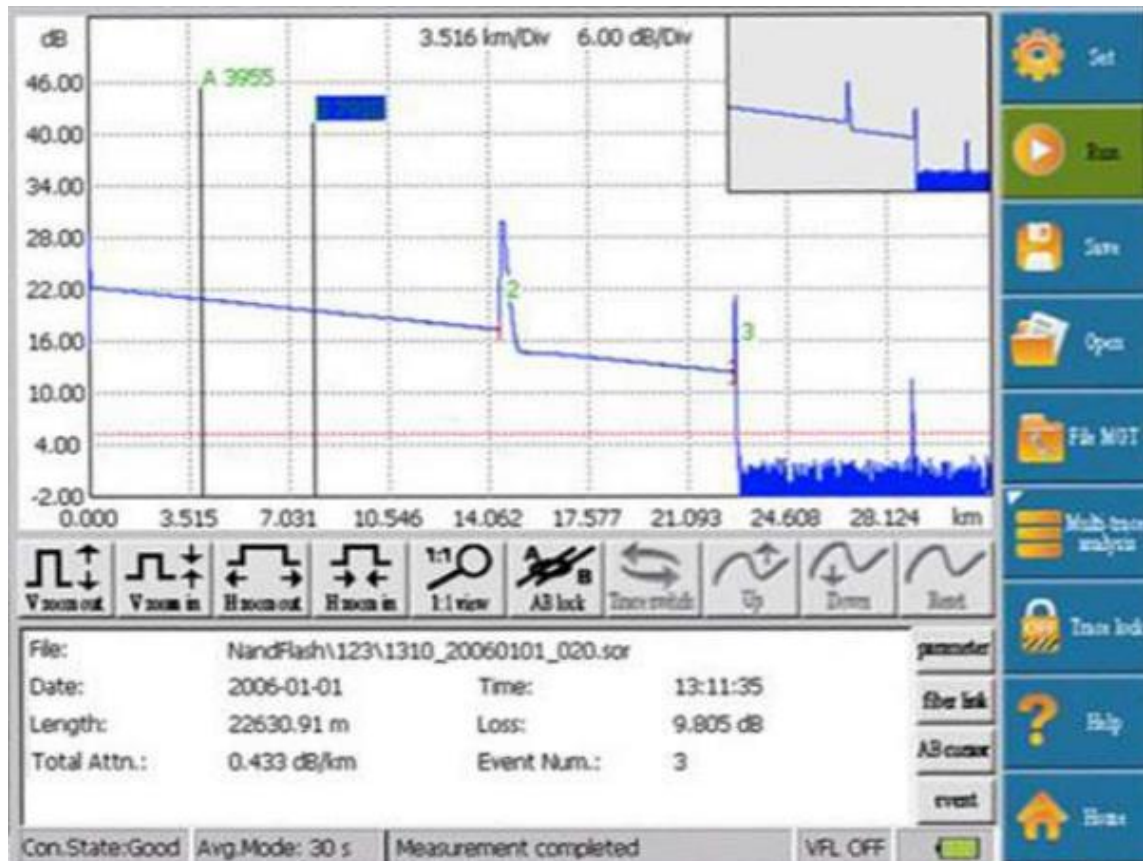

Superi 4430, CABA (1430)

info@gtt.com.ar

www.gtt.com.ar



GLOBAL TEC TRADE SRL




11-2300-3000

Pantalla táctil a color



Detalles del producto

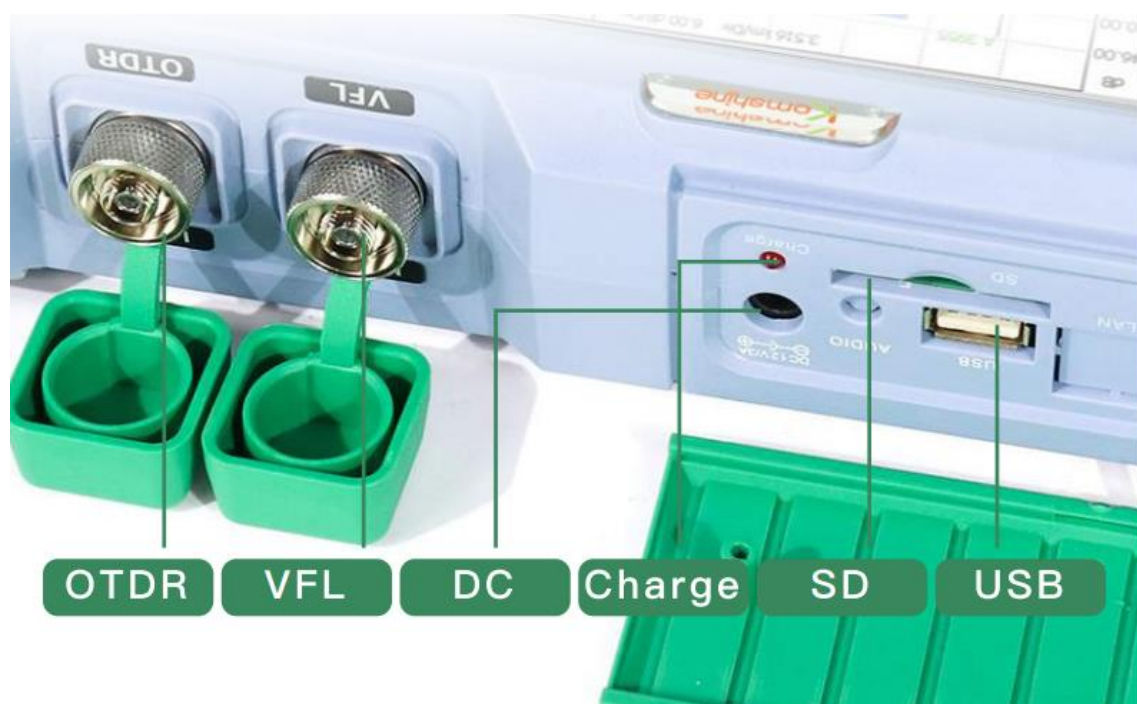

Superi 4430, CABA (1430)

info@gtt.com.ar

www.gtt.com.ar



Características del Producto



Shock resistant



Water resistant



Drop resistant



Dust resistant

Especificaciones del Producto

Model	QX50-M	QX50-S	QX50-P	QX50-MS
Wavelength(nm)	850/1300	1310/1550	1310/1550/1625	850/1300+1310/1550
Build-in VFL	Y		N	
Applicable fiber	SM(ITU-T G.652)			
Distance range(km)	0.1,0.5,1,2,5,10,20,30,50,100,200,240			
Pulse width(ns)	5,20,40,80,160,320,640,1280,2560,5120,10240,20480			
Event dead zone(dB)	1.8			
Attenuation dead zone(m)	3			
Dynamic range(dB)	21/23	32/30	32/30/28	21/23+32/30
Optical connector	FC/UPC (SC/LC/ST can be selected)			
Laser class	Class 1m			
Memory of trances	10,000pieces			

Superi 4430, CABA (1430)

info@gtt.com.ar

www.gtt.com.ar