




# GLOBAL TEC TRADE SRL

 11-2300-3000

## OTDR ORIENTEK TR600



- Applicable fiber: SM MM PON
- <1.8m extra-short event dead zone
- Wavelength: Singlemode 1310/1550nm
- Up to 32/30dB High Dynamic Range
- Distance Range: 4,8,16,32,64,128,256km
- 640x480, 5.7 inch TFT-LCD (touch screen)
- One year Warranty
- USB interfaces, supporting USB stick and printer and direct cable download to PC via ActiveSync
- Memory capacity >800 traces
- Built-in lithium battery with high capacity for over 8 hours of operating life
- Display: Color LCD

## Support four interface fiber types



ST



FC



SC



LC


Superi 4430, CABA (1430)


info@gtt.com.ar

www.gtt.com.ar



# GLOBAL TEC TRADE SRL

 11-2300-3000

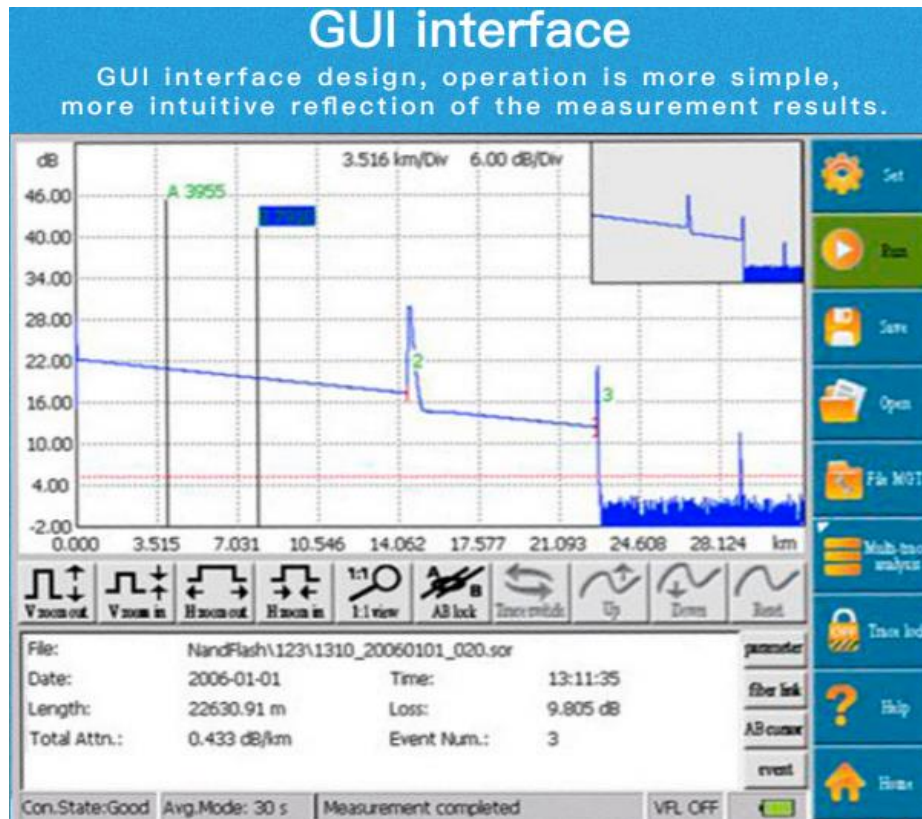

### Color touch screen

Touch and key make operation more varied. To satisfy different people's habits and improve their work efficiency.




Superi 4430, CABA (1430)


info@gtt.com.ar

www.gtt.com.ar



# GLOBAL TEC TRADE SRL

 11-2300-3000

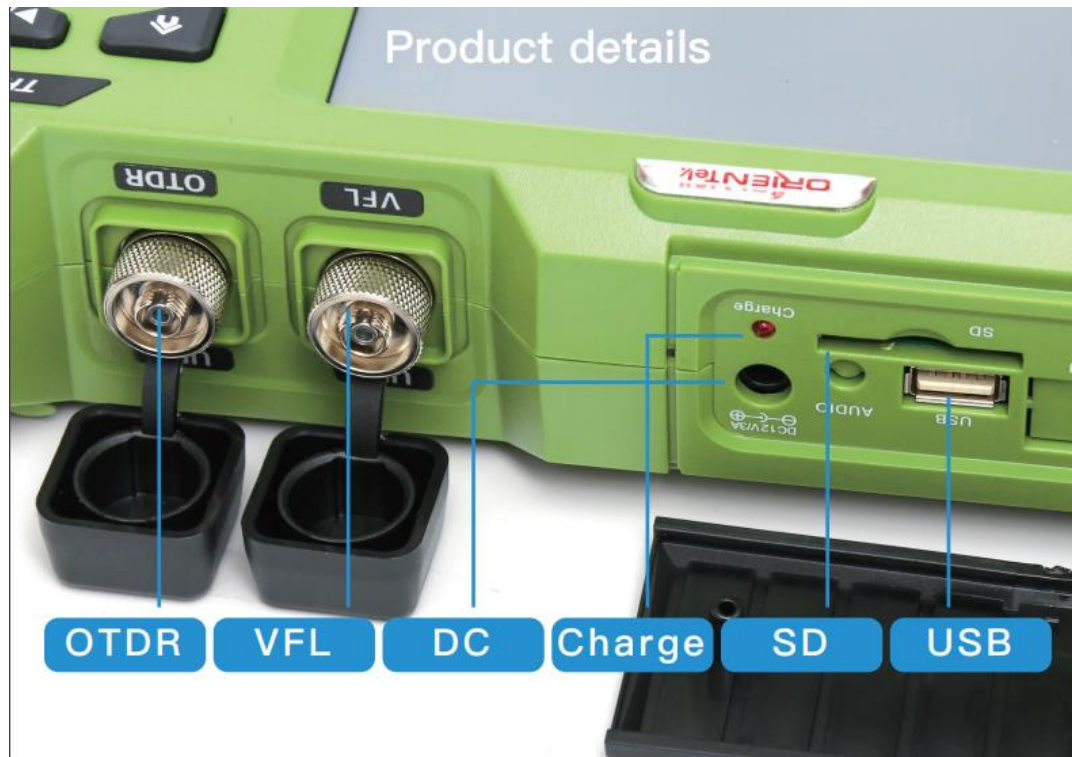


Superi 4430, CABA (1430)

[info@gtt.com.ar](mailto:info@gtt.com.ar)

[www.gtt.com.ar](http://www.gtt.com.ar)




# GLOBAL TEC TRADE SRL

 11-2300-3000

## PRODUCT FEATURES



Shock resistant

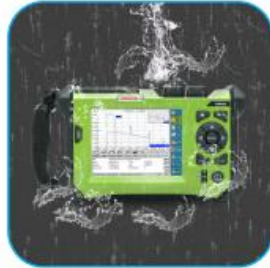

Water resistant



Drop resistant



Dust resistant

## PRODUCT SPECIFICATION:

Model	TR600-M	TR600-S	TR600-P1	TR600-P2	TR600-MS
Wavelength(nm)	850/1300	1310/1550	1310/1490/1550	1310/1550/1625	850/1300+1310/1550
Build-in VFL	Y			N	
Applicable fiber	SM(ITU-T G.652)				
Distance range(km)	0.1,0.5,1,2,5,10,20,30,50,100,200,240				
Pulse width(ns)	5,20,40,80,160,320,640,1280,2560,5120,10240,20480				
Event dead zone(dB)	1.8				
Attenuation dead zone(m)	3				
Dynamic range(dB)	21/19	32/30	32/30/28	32/30/28	21/19 + 32/30
Optical connector	FC/PC or SC/PC (APC can be selected)				
Laser class	Class 1m				
Memory of trances	10,000pieces				

Superi 4430, CABA (1430)

info@gtt.com.ar

www.gtt.com.ar