


#### **GLOBAL TEC TRADE SRL**





# ZS1000-AOTDR

Test length/break point/loss, up to 100 kilometers

Measure fiber breakpoint

Measure fiber length

Measure break point loss

USB export data









optical fiber cleaver



#### ZS1000-A



The ZS1000-A Multifunctional Optical Time Domain Reflects automatically tested with one button. It is easy to operate. handheld design is more compact, easy to carry and can be Short blind zone (15rn), high-speed signal processing, shor and quick analysis. It can store 10,000 waveforms, and the has a higher contrast color. The quality of the waveform ca improved, the USB terminal shape is more, and the IF D LC a higher contrast color. The quality of the waveform can be and the USB port can be connected to a computer. With inc signal automatic detection and self-protection function, bui source, humanized OTDR anti-reality software shows the de event.


Superi 4430, CABA (1430)

info@gtt.com.ar

www.gtt.com.ar



#### **GLOBAL TEC TRADE SRL**








# 3.5 inch big TFT color screen

Button mode operation, fast and conver

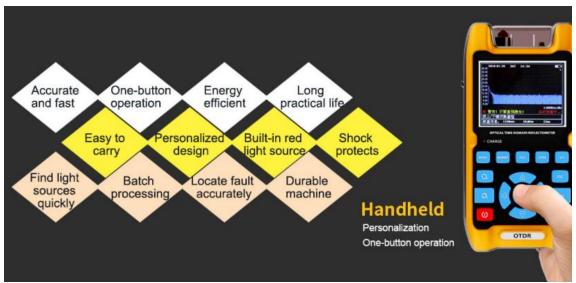


Superi 4430, CABA (1430)

info@gtt.com.ar

www.gtt.com.ar



### **GLOBAL TEC TRADE SRL**






## **Basic parameters**



Dynamic Range	32dB/30dB (100 km)
Wave length	1310±20mm/1550±20mm
Event Dead Zone	<1.5m
Attenuation Dead Zone	<0.8m
Pulse Width	10ns,25s,50ns,100ns,250ns,500ns,1us,2.5ns,5us
Distance uncertainty	± (1.0m ±0.005% * testing distance±resoluti
Linearity	±.05dB/dB
Loss Resolution	0.001dB
Distance Resolution	1m
Connector	FC (Standard) SC LC (Optional)
VFL	1mW
Data Storage	>20000 traces (standard 4GB SD card)
Display	3.5 inch TFT color LCD
Interface	USB
Battery	Built-in rechargeable battery
Working Time	> 10 hours (according Bellcore TR-NWT-00113

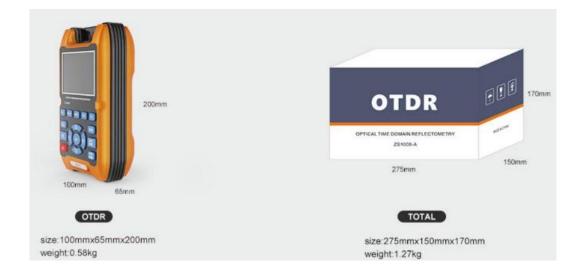

Superi 4430, CABA (1430)

info@gtt.com.ar

www.gtt.com.ar